




FLUORESCENT LIGHT




OFFO-RPC

3000.-

DIA 90x85 mm. L 1257 mm.

 LED T8x1
Matt white trim

IP 20

 Recessed type
Aluminium body
Acrylic diffuser


OFFO-SPC

3000.-

DIA 55x85 mm. L 1250 mm.

 LED T8x1
Matt white, Matt silver, Matt black

IP 20

 Surface mounted type
Aluminium body
Acrylic diffuser








OFFO-RLV

3200.-

DIA 90x85 mm. L 1257 mm.

 LED T8x1
 Matt white trim

IP 20

-  Recessed type
Aluminium body
Mirror anodized aluminum louver


OFFO-SLV

3200.-


DIA 68x90 mm. L 1245 mm.

 LED T8x1
 Matt silver

IP 20

-  Surface mounted type
Aluminium body
Mirror anodized aluminum louver



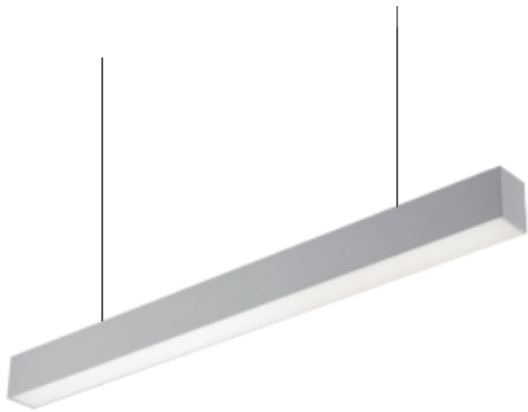

OFFO-P

3000.-

DIA 55x85 mm. L 1250 mm.



LED T8x1

Matt white, Matt silver, Matt black

IP 20



Aluminium body

Acrylic diffuser

1.5m. Sling

OFFO-2P

5600.-

DIA 85x140 mm. L 1250 mm.



LED T8x2

Matt white, Matt silver, Matt black


IP 20



Aluminium body

Acrylic diffuser

1.5m. Sling

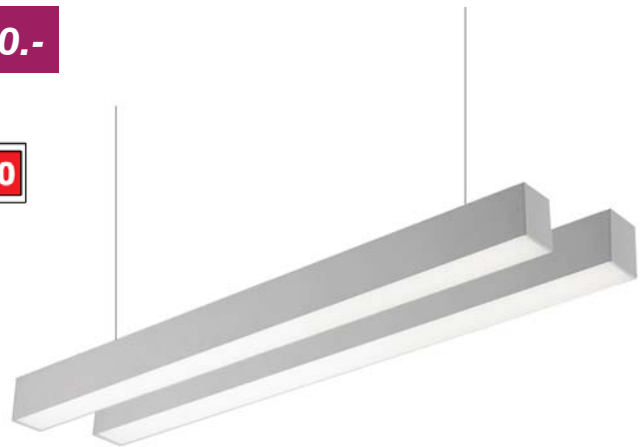



BAM **6500.-**

DIA 45x45 mm. L 1000 mm.



LED SMD 40W 2950lm



4000K

Matt black



Aluminium body

1.5m. Sling

Accessories : Honeycomb, Frosted glass

Clear glass

RECTA **3000.-**

DIA 200x1200 mm. H 60 mm.



LED SMD 48W 3600lm



4000K, 6500K


Matt black trim




Metal body

Acrylic diffuser

1.5m. Sling

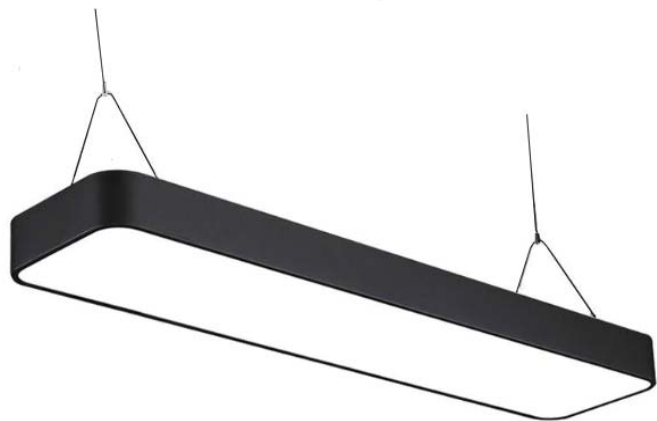

FLUORESCENT LIGHT

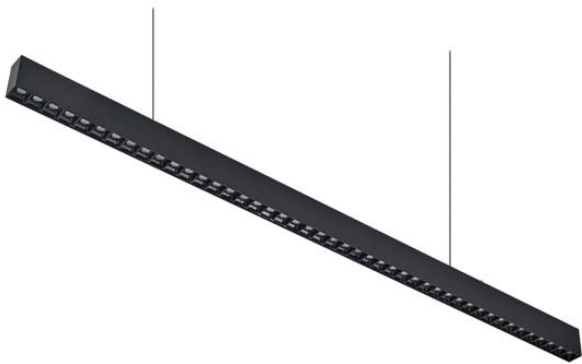

BLADE-A **4500.-**

DIA 33x60 mm. L 1200 mm.



LED 40W 3200lm



3000K, 4000K

Matt white/ Matt black

IP 20



Aluminium body
1.5m. Sling

BLADE-B **4500.-**

DIA 33x60 mm. L 1200 mm.



LED 40W 3200lm




4000K, 6500K

Matt white/ Matt black

IP 20



Aluminium body
Acrylic diffuser
1.5m. Sling

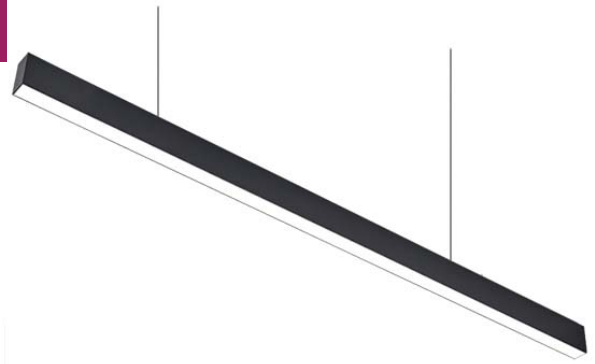

BLADE-C **4500.-**

DIA 33x60 mm. L 1200 mm.



LED 20W + 20W 3200lm



4000K

Matt white/ Matt black

IP 20



Aluminium body
Acrylic diffuser
1.5m. Sling

FLUORESCENT LIGHT

TUBE

3600.-

DIA 60 mm. L 1220 mm.



LED T8x1



Matt silver end cap


IP 20



Aluminium body

Acrylic diffuser

2m. Sling

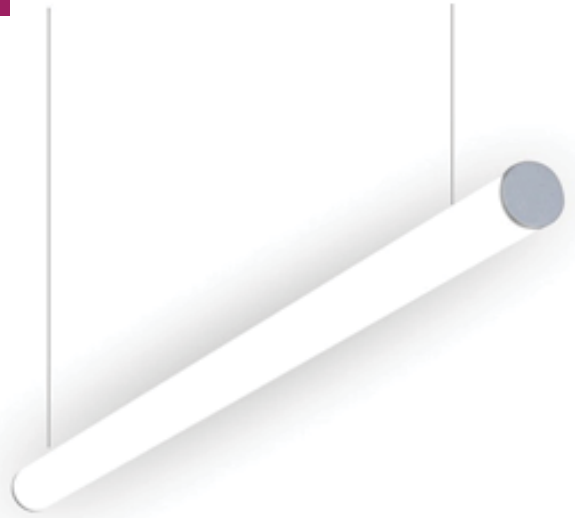

JELLY

2500.-

DIA 22x53 mm. L 1200 mm.



LED 30W 2400lm



4000K, 6500K

Matt black

IP 20



PC body

Acrylic diffuser

1.5m. Sling







NEO-PS1

2100.-

DIA 90x90 mm. L 1222 mm.

 LED T8x1
Matt white, Matt black


IP 20

 Cold rolled steel housing
Acrylic diffuser
1m. Sling


NEO-PS2

2500.-

DIA 90x90 mm. L 1222 mm.

 LED T8x2
Matt white, Matt black

IP 20


 Cold rolled steel housing
Acrylic diffuser
1m. Sling




NEO-PSD

5000.-

DIA 80x180 mm. L 1222 mm.

 LED T8x2
Matt white, Matt black

IP 20

 Cold rolled steel housing
Acrylic diffuser
1m. Sling


FLUORESCENT LIGHT




NEO-PV1

2300.-

DIA 90x120 mm. L 1125 mm.

 LED T8x1
Matt white, Matt black


IP 20

-  Cold rolled steel housing
- Mirror anodized aluminum louver
- 1m. Sling


NEO-PV2

2700.-

DIA 90x120 mm. L 1125 mm.

 LED T8x2
Matt white, Matt black

IP 20


-  Cold rolled steel housing
- Mirror anodized aluminum louver
- 1m. Sling




NEO-PVD

5500.-

DIA 80x180 mm. L 1222 mm.

 LED T8x2
Matt white, Matt black

IP 20

-  Cold rolled steel housing
- Mirror anodized aluminum louver
- 1m. Sling



FLUORESCENT LIGHT



NEO-DS

3600.-

DIA 65x110 mm. L 1222 mm.




LED T8x2
Matt white, Matt black

IP 20



Cold rolled steel housing
Acrylic diffuser
1m. Sling

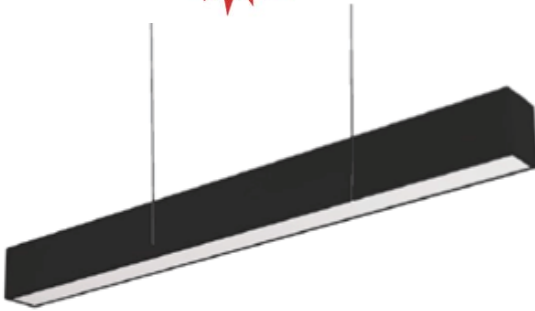

NEO-DV

3600.-

DIA 65x110 mm. L 1222 mm.



LED T8x2
Matt white, Matt black

IP 20



Cold rolled steel housing
Mirror anodized aluminum louver
1m. Sling





NEO-RV1

2000.-

DIA 100x120 mm. L 1143 mm.



LED T8x1
Matt white, Matt black

IP 20



Recessed type
Cold rolled steel housing
Mirror anodized aluminum louver

NEO-RV2

2500.-

DIA 100x120 mm. L 1143 mm.



LED T8x2
Matt white, Matt black

IP 20



Recessed type
Cold rolled steel housing
Mirror anodized aluminum louver





NEO-RS1

1800.-

DIA 100x90 mm. L 1240 mm.



LED T8x1
Matt white, Matt black

IP 20

- Recessed type
Cold rolled steel housing
Acrylic diffuser

NEO-RS2

2000.-

DIA 100x90 mm. L 1240 mm.



LED T8x2
Matt white, Matt black

IP 20

- Recessed type
Cold rolled steel housing
Acrylic diffuser





NEO-SV1

2000.-

DIA 90x120 mm. L 1125 mm.



LED T8x1
Matt white, Matt black

IP 20



Surface mounted type
Cold rolled steel housing
Mirror anodized aluminum louver

NEO-SV2

2300.-

DIA 90x120 mm. L 1125 mm.



LED T8x2
Matt white, Matt black

IP 20



Surface mounted type
Cold rolled steel housing
Mirror anodized aluminum louver





NEO-SS1

1750.-

DIA 90x90 mm. L 1222 mm.



LED T8x1
Matt white, Matt black

IP 20

- Surface mounted type
Cold rolled steel housing
Acrylic diffuser

NEO-SS2

2000.-

DIA 90x90 mm. L 1222 mm.



LED T8x2
Matt white, Matt black

IP 20

- Surface mounted type
Cold rolled steel housing
Acrylic diffuser





NEO-RPC

Recessed acrylic diffuser luminaire

- T8 2x18W Size : 30x60 cm.
- T8 2x18W Size : 60x60 cm.
- T8 3x18W Size : 60x60 cm.
- T8 4x18W Size : 60x60 cm.
- T8 2x36W Size : 30x120 cm.
- T8 2x36W Size : 60x120 cm.
- T8 3x36W Size : 60x120 cm.
- T8 4x36W Size : 60x120 cm.

NEO-SPC

Surface mounted acrylic diffuser luminaire

- T8 2x18W Size : 30x60 cm.
- T8 2x18W Size : 60x60 cm.
- T8 3x18W Size : 60x60 cm.
- T8 4x18W Size : 60x60 cm.
- T8 2x36W Size : 30x120 cm.
- T8 2x36W Size : 60x120 cm.
- T8 3x36W Size : 60x120 cm.
- T8 4x36W Size : 60x120 cm.





NEO-RLV

Recessed louver luminaire

- T8 2x18W Size : 30x60 cm.
- T8 2x18W Size : 60x60 cm.
- T8 3x18W Size : 60x60 cm.
- T8 4x18W Size : 60x60 cm.
- T8 2x36W Size : 30x120 cm.
- T8 2x36W Size : 60x120 cm.
- T8 3x36W Size : 60x120 cm.
- T8 4x36W Size : 60x120 cm.

NEO-SLV

Surface mounted louver luminaire

- T8 2x18W Size : 30x60 cm.
- T8 2x18W Size : 60x60 cm.
- T8 3x18W Size : 60x60 cm.
- T8 4x18W Size : 60x60 cm.
- T8 2x36W Size : 30x120 cm.
- T8 2x36W Size : 60x120 cm.
- T8 3x36W Size : 60x120 cm.
- T8 4x36W Size : 60x120 cm.





CURVE-1

Recessed indirect light luminaire

T8 2x18W Size : 60x60 cm.

T8 2x36W Size : 60x120 cm.

CURVE-2

Recessed indirect light luminaire

T8 2x18W Size : 60x60 cm.

T8 2x36W Size : 60x120 cm.





U-TYPE

U-type acrylic diffuser luminaire

T8 1x18W Size : 70x100xL636 mm.

T8 2x18W Size : 210x75xL636 mm.

T8 1x36W Size : 70x100xL1245 mm.

T8 2x36W Size : 210x75xL1245 mm.

WEATHER PROOF

Weather proof luminaire

T8 1x18W Size : 65x65xL640 mm.

T8 2x18W Size : 115x65xL640 mm.

T8 1x36W Size : 65x65xL1240 mm.

T8 2x36W Size : 115x65xL1240 mm.





CLEAN ROOM

Recessed clean room luminaire

- T8 2x18W Size : 30x60 cm.
- T8 2x18W Size : 60x60 cm.
- T8 3x18W Size : 60x60 cm.
- T8 4x18W Size : 60x60 cm.
- T8 2x36W Size : 30x120 cm.
- T8 2x36W Size : 60x120 cm.
- T8 3x36W Size : 60x120 cm.
- T8 4x36W Size : 60x120 cm.

CLEAN ROOM

Surface mounted clean room luminaire

- T8 2x18W Size : 30x60 cm.
- T8 2x18W Size : 60x60 cm.
- T8 3x18W Size : 60x60 cm.
- T8 4x18W Size : 60x60 cm.
- T8 2x36W Size : 30x120 cm.
- T8 2x36W Size : 60x120 cm.
- T8 3x36W Size : 60x120 cm.
- T8 4x36W Size : 60x120 cm.





COLD ROOM

Surface cold room luminaire

- T8 1x18W Size : 70x100xL636 mm.
- T8 2x18W Size : 120x75xL636 mm.
- T8 1x36W Size : 70x100xL1245 mm.
- T8 2x36W Size : 120x75xL1245 mm.

WIRE GUARD

Wire guard batten type luminaire

- T8 1x18W Size : 110x108xL670 mm.
- T8 2x18W Size : 110x170xL670 mm.
- T8 1x36W Size : 110x108xL1270 mm.
- T8 2x36W Size : 110x170xL1270 mm.





T5 SET

LED T5 SET 3000K, 4000K, 6500K

- 3.4W Size : 21x32xL325 mm.
- 6.5W Size : 21x32xL585 mm.
- 9W Size : 21x32xL885 mm.
- 13W Size : 21x32xL1185 mm.

T8 SET

LED T8 SET 3000K, 4000K, 6500K

- T8 1x9W Size : 110x108xL670 mm.
- T8 1x18W Size : 110x170xL670 mm.





TAPER

Taper batten type luminaire

- T8 1x18W Size : 70x100xL636 mm.
- T8 2x18W Size : 120x75xL636 mm.
- T8 1x36W Size : 70x100xL1245 mm.
- T8 2x36W Size : 120x75xL1245 mm.

INDRUSTRIAL

Industrial type luminaire

- T8 1x18W Size : 110x108xL670 mm.
- T8 2x18W Size : 110x170xL670 mm.
- T8 1x36W Size : 110x108xL1270 mm.
- T8 2x36W Size : 110x170xL1270 mm.

